




13	300	350	–	–	0.5	424	1250; 2000; 2500	1.66
12	250	300	–	–	0.5	374	1250; 2000; 2500	1.47
11	200	250	–	–	0.5	324	1250; 2000; 2500	1.27
10	160	210	–	–	0.5	284	1250; 2000; 2500	1.11
9	150	200	–	–	0.5	274	1250; 2000; 2500	1.08
8	125	175	–	–	0.5	249	1250; 2000; 2500	0.98
7	120	170	–	–	0.5	244	1250; 2000; 2500	0.96
6	100	150	–	–	0.5	224	1250; 2000; 2500	0.88
5	80	130	–	–	0.5	204	1250; 2000; 2500	0.80
4	75	125	–	–	0.5	199	1250; 2000; 2500	0.78
3	60	110	–	–	0.5	184	1250; 2000; 2500	0.72
2	50	100	–	–	0.5	174	1250; 2000; 2500	0.68
1	40	90	–	–	0.5	164	1250; 2000; 2500	0.64
Pos. Nr.	Plattenstärke D [mm]	A [mm]	B [mm]	K [°]	Blechstärke [mm]	Abwicklung [mm]	Längen [mm]	Gewicht [kg/mb]

Projekt	–
	–

Inhalt	Kantprofil 002 Außeneckprofil ungleichschenkelig
--------	---

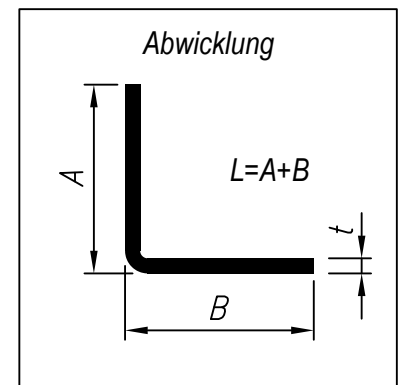

Bearbeitet von	Europanel	Datum	2010.07.25
----------------	-----------	-------	------------

Maßstab	1:1
---------	-----

Nr. der Zeichnung	21-02	Änderung	A
-------------------	-------	----------	---

Datei	21-02.dwg
-------	-----------

Die endgültige Entscheidung für die Auswahl und die Details zur konkreten Ausführung der Konstruktion wird von dem Projektanten getroffen.