


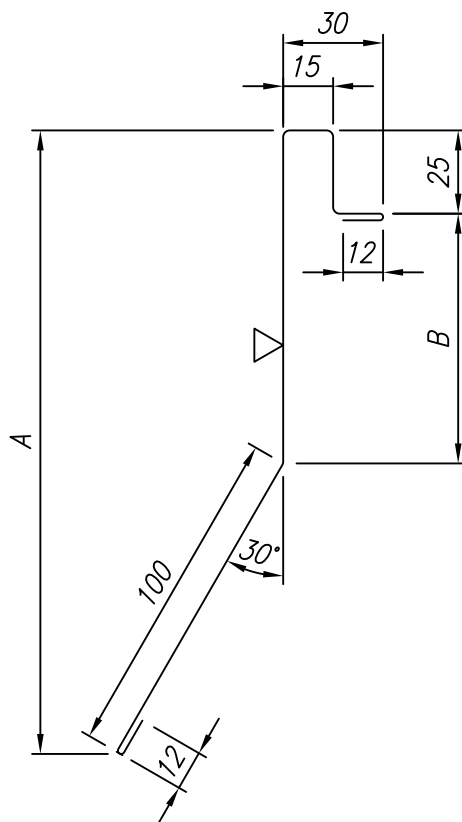

12	300	412	300	–	0.5	504	1250; 2000; 2500	1.98
11	250	362	250	–	0.5	454	1250; 2000; 2500	1.78
10	200	312	200	–	0.5	404	1250; 2000; 2500	1.59
9	150	262	150	–	0.5	354	1250; 2000; 2500	1.39
8	125	237	125	–	0.5	329	1250; 2000; 2500	1.29
7	120	232	120	–	0.5	324	1250; 2000; 2500	1.27
6	100	212	100	–	0.5	304	1250; 2000; 2500	1.19
5	80	192	80	–	0.5	284	1250; 2000; 2500	1.11
4	75	187	75	–	0.5	279	1250; 2000; 2500	1.10
3	60	172	60	–	0.5	264	1250; 2000; 2500	1.04
2	50	162	50	–	0.5	254	1250; 2000; 2500	1.00
1	40	152	40	–	0.5	244	1250; 2000; 2500	0.96
LP	Panel thickness D [mm]	~A [mm]	B [mm]	K [°]	Steel thickness [mm]	Width of steel [mm]	Length [mm]	Weight [kg/mb]

Project	–
---------	---

Content	Flashing 007A Masking flashing
---------	-----------------------------------

Designed by	Europanel	Date	2010.07.25
-------------	-----------	------	------------

Drawing no.	21–07A	Change	A
-------------	--------	--------	---



Scale	1:2
-------	-----

File	21–07A.dwg
------	------------

The designer makes the final decision regarding using the specific solution