


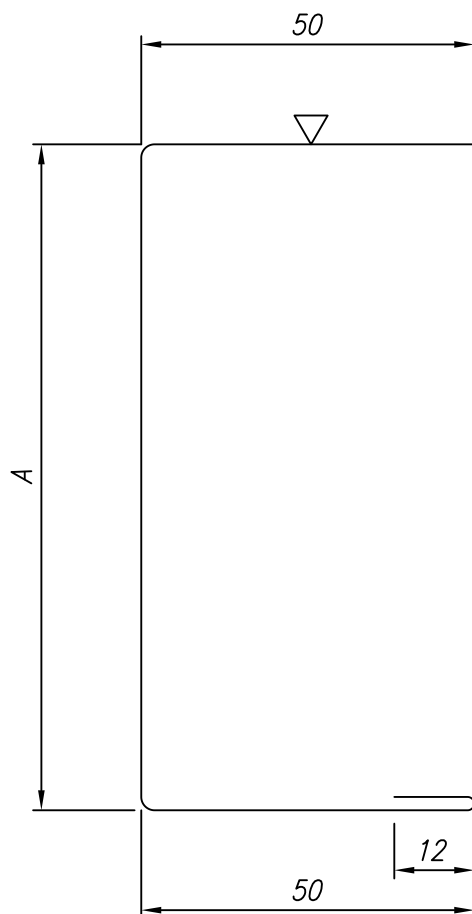

12	300	300	—	—	0.5	412	1250; 2000; 2500	1.62
11	250	250	—	—	0.5	362	1250; 2000; 2500	1.42
10	200	200	—	—	0.5	312	1250; 2000; 2500	1.22
9	150	150	—	—	0.5	262	1250; 2000; 2500	1.03
8	125	125	—	—	0.5	237	1250; 2000; 2500	0.93
7	120	120	—	—	0.5	232	1250; 2000; 2500	0.91
6	100	100	—	—	0.5	212	1250; 2000; 2500	0.83
5	80	80	—	—	0.5	192	1250; 2000; 2500	0.75
4	75	75	—	—	0.5	187	1250; 2000; 2500	0.73
3	60	60	—	—	0.5	172	1250; 2000; 2500	0.68
2	50	50	—	—	0.5	162	1250; 2000; 2500	0.64
1	40	40	—	—	0.5	152	1250; 2000; 2500	0.60
LP	Panel thickness D [mm]	A [mm]	B [mm]	K [°]	Steel thickness [mm]	Width of steel [mm]	Length [mm]	Weight [kg/mb]

Project	—
---------	---

Content	Flashing 009 C profile
---------	---------------------------

Designed by	Europanel
-------------	-----------

Date	2010.07.25
------	------------

Drawing no.	21-09
-------------	-------

Change	A
--------	---



Scale	1:1
-------	-----

File	21-09.dwg
------	-----------

The designer makes the final decision regarding using the specific solution