


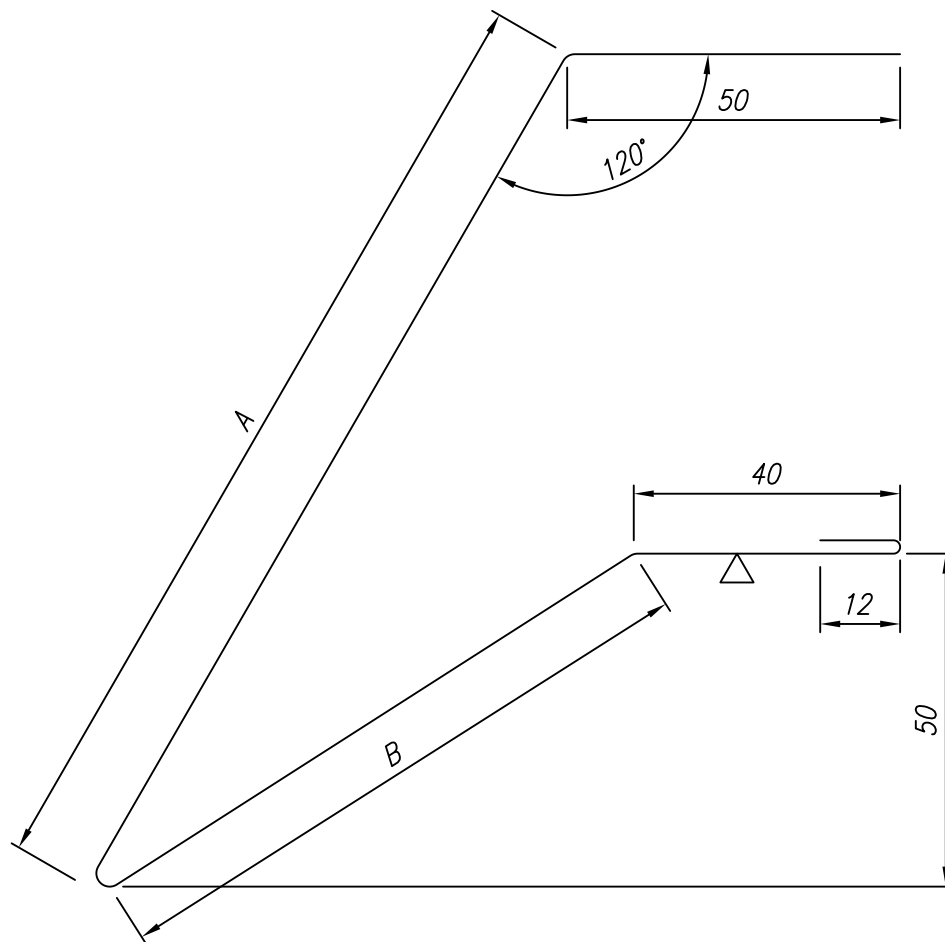

12	300	404	218	–	0.5	724	1250; 2000; 2500	2.84
11	250	346	190	–	0.5	638	1250; 2000; 2500	2.51
10	200	289	162	–	0.5	553	1250; 2000; 2500	2.17
9	150	231	135	–	0.5	468	1250; 2000; 2500	1.84
8	125	202	122	–	0.5	426	1250; 2000; 2500	1.67
7	120	196	119	–	0.5	417	1250; 2000; 2500	1.64
6	100	173	109	–	0.5	384	1250; 2000; 2500	1.51
5	80	150	99	–	0.5	351	1250; 2000; 2500	1.38
4	75	144	96	–	0.5	343	1250; 2000; 2500	1.34
3	60	127	89	–	0.5	318	1250; 2000; 2500	1.25
2	50	115	84	–	0.5	302	1250; 2000; 2500	1.18
1	40	104	80	–	0.5	286	1250; 2000; 2500	1.12
LP	Panel thickness D [mm]	~A [mm]	~B [mm]	K [°]	Steel thickness [mm]	Width of steel [mm]	Length [mm]	Weight [kg/mb]

Project	–
---------	---

Content	Flashing 011 Drip cap flashing
---------	-----------------------------------

Designed by	Europanel	Date	2010.07.25
-------------	-----------	------	------------

Drawing no.	21–11	Change	A
-------------	-------	--------	---



Scale	1:1
-------	-----

File	21–11.dwg
------	-----------

The designer makes the final decision regarding using the specific solution