


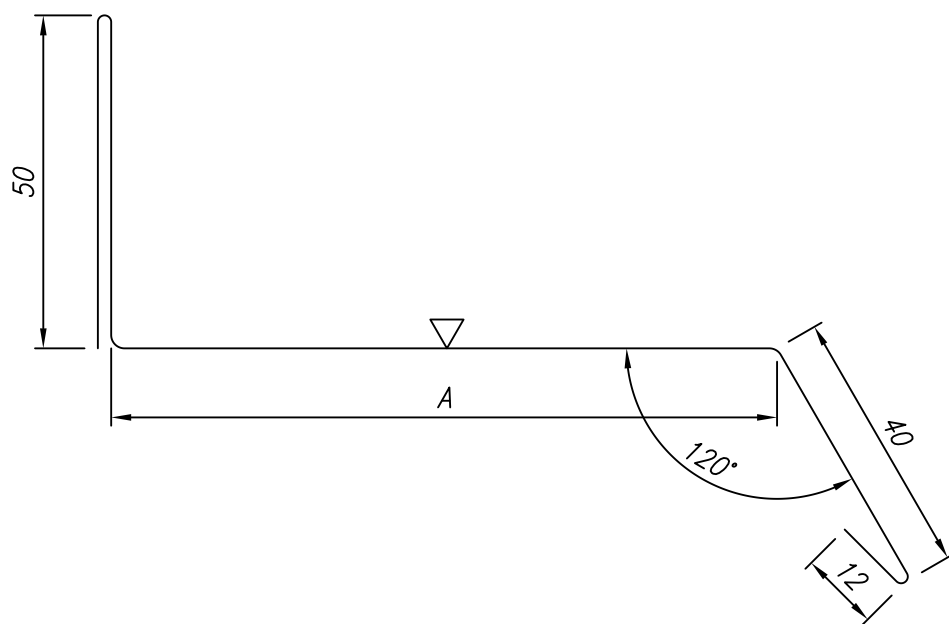

13	300	330	–	–	0.5	482	1250; 2000; 2500	1.89
12	250	280	–	–	0.5	432	1250; 2000; 2500	1.70
11	200	230	–	–	0.5	382	1250; 2000; 2500	1.50
10	160	190	–	–	0.5	342	1250; 2000; 2500	1.34
9	150	180	–	–	0.5	332	1250; 2000; 2500	1.30
8	125	155	–	–	0.5	307	1250; 2000; 2500	1.20
7	120	150	–	–	0.5	302	1250; 2000; 2500	1.19
6	100	130	–	–	0.5	282	1250; 2000; 2500	1.11
5	80	110	–	–	0.5	262	1250; 2000; 2500	1.03
4	75	105	–	–	0.5	257	1250; 2000; 2500	1.01
3	60	90	–	–	0.5	242	1250; 2000; 2500	0.95
2	50	80	–	–	0.5	232	1250; 2000; 2500	0.91
1	40	70	–	–	0.5	222	1250; 2000; 2500	0.87
LP	Panel thickness [mm]	A [mm]	B [mm]	K [°]	Steel thickness [mm]	width of steel [mm]	length [mm]	weight [kg/mb]

Project	–
	–

Content	Flashing 013 Starting strip
---------	--------------------------------

designed by	Europanel	Date	2010.07.25
-------------	-----------	------	------------

drawing no.	21–13	Change	A
-------------	-------	--------	---



scale	1:1
-------	-----

file	21–13.dwg
------	-----------

The designer makes the final decision regarding using the specific solution