


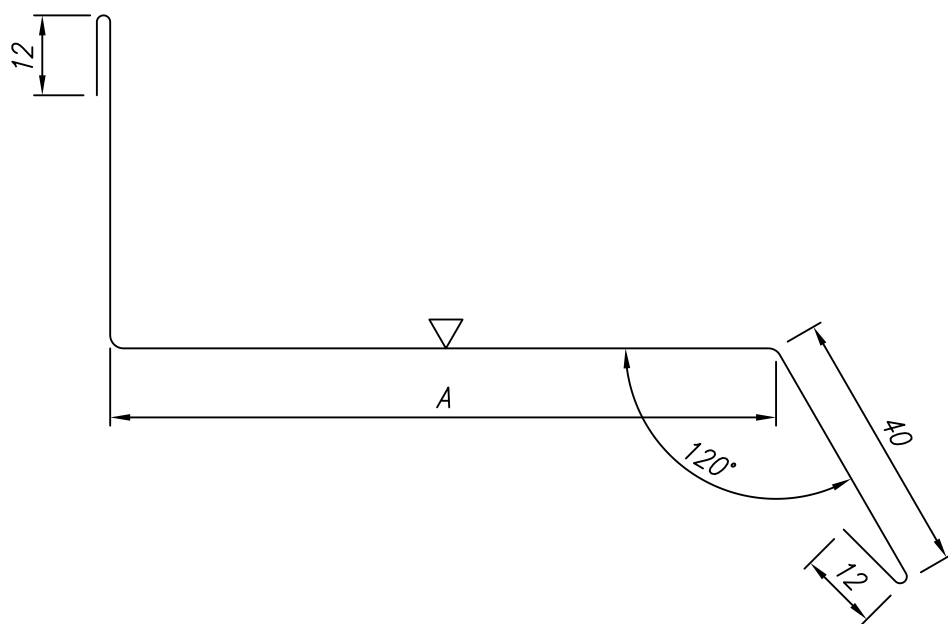

13	300	330	-	-	0.5	444	1250; 2000; 2500	1.74
12	250	280	-	-	0.5	394	1250; 2000; 2500	1.55
11	200	230	-	-	0.5	344	1250; 2000; 2500	1.35
10	160	190	-	-	0.5	304	1250; 2000; 2500	1.19
9	150	180	-	-	0.5	294	1250; 2000; 2500	1.15
8	125	155	-	-	0.5	269	1250; 2000; 2500	1.06
7	120	150	-	-	0.5	264	1250; 2000; 2500	1.04
6	100	130	-	-	0.5	244	1250; 2000; 2500	0.96
5	80	110	-	-	0.5	224	1250; 2000; 2500	0.88
4	75	105	-	-	0.5	219	1250; 2000; 2500	0.86
3	60	90	-	-	0.5	204	1250; 2000; 2500	0.80
2	50	80	-	-	0.5	194	1250; 2000; 2500	0.76
1	40	70	-	-	0.5	184	1250; 2000; 2500	0.72
LP	Panel thickness D [mm]	A [mm]	B [mm]	K [°]	Steel thickness [mm]	width of steel [mm]	length [mm]	weight [kg/mb]

Project	-
	-

Content	Flashing 013 A Starting strip
---------	----------------------------------

designed by	Europanel
-------------	-----------

Date	2013.07.10
------	------------

drawing no.	21-13 A
-------------	---------

Change	A
--------	---



scale	1:1
-------	-----

file	21-13_A.dwg
------	-------------

The designer makes the final decision regarding using the specific solution