


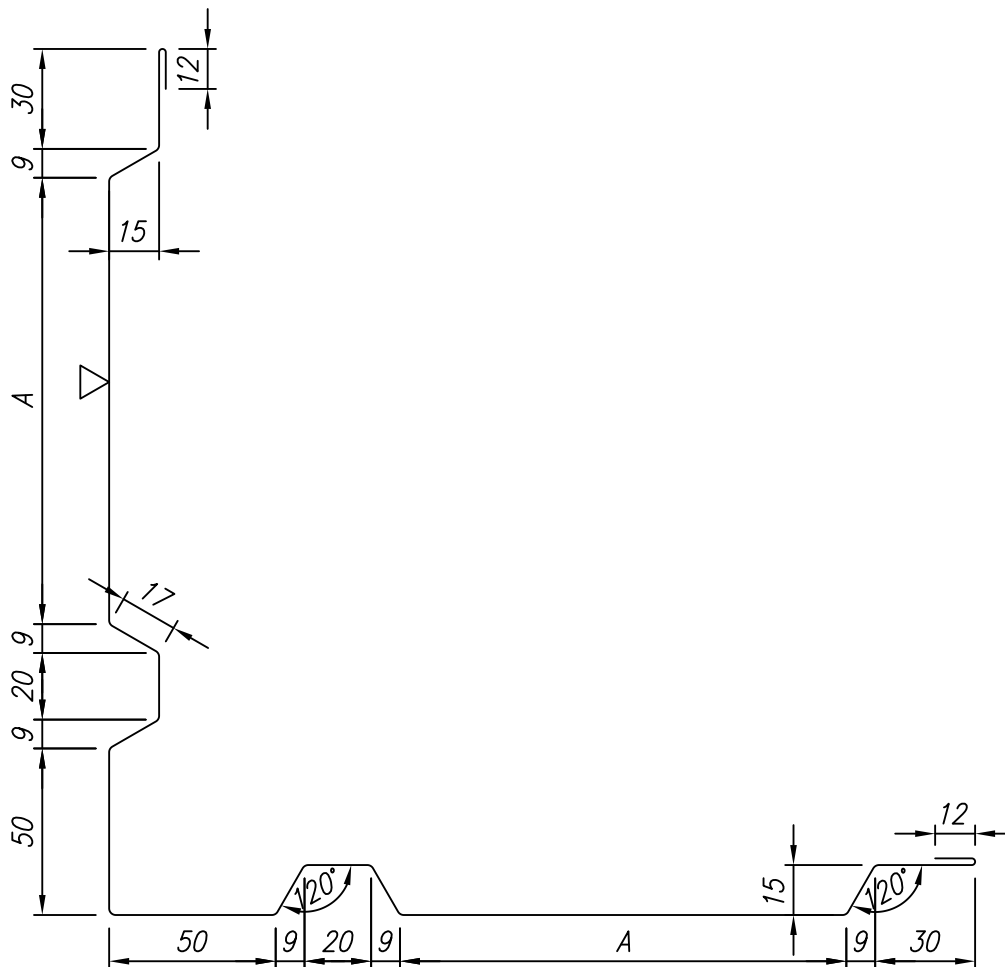

13	300	334	-	-	0.5	996	1250; 2000; 2500	3.91
12	250	284	-	-	0.5	896	1250; 2000; 2500	3.52
11	200	234	-	-	0.5	796	1250; 2000; 2500	3.12
10	160	194	-	-	0.5	716	1250; 2000; 2500	2.81
9	150	184	-	-	0.5	696	1250; 2000; 2500	2.73
8	125	159	-	-	0.5	646	1250; 2000; 2500	2.54
7	120	154	-	-	0.5	636	1250; 2000; 2500	2.50
6	100	134	-	-	0.5	596	1250; 2000; 2500	2.34
5	80	114	-	-	0.5	556	1250; 2000; 2500	2.18
4	75	109	-	-	0.5	546	1250; 2000; 2500	2.14
3	60	94	-	-	0.5	516	1250; 2000; 2500	2.02
2	50	84	-	-	0.5	496	1250; 2000; 2500	1.95
1	40	74	-	-	0.5	476	1250; 2000; 2500	1.87
LP	Panel thickness D [mm]	A [mm]	B [mm]	K [°]	Steel thickness [mm]	Width of steel [mm]	Length [mm]	Weight [kg/mb]

Project	-
---------	---

Content	Flashing 018 External corner
---------	---------------------------------

Designed by	Europanel	Date	2010.07.26
-------------	-----------	------	------------

Drawing no.	21-18	Change	A
-------------	-------	--------	---



Scale	1:2
-------	-----

File	21-18.dwg
------	-----------

The designer makes the final decision regarding using the specific solution